

DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® SC655 is a medium viscosity acetal homopolymer, developed for parts requiring high precision molding in the healthcare industry.

SPECIAL CONTROL for HEALTHCARE APPLICATIONS

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. This product is also tested against ISO 10993-5 and -11 and selected parts of USP Class VI. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	13	cm ³ /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	15	g/10min	ISO 1133
Moulding shrinkage, parallel	2.0	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.9	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	3100	MPa	ISO 527-1/-2
Yield stress	71	MPa	ISO 527-1/-2
Yield strain	17	%	ISO 527-1/-2
Nominal strain at break	30	%	ISO 527-1/-2
Flexural Modulus	2950	MPa	ISO 178
Flexural Stress at 3.5%	80	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	2800	MPa	
1000h	1600	MPa	
Charpy impact strength			ISO 179/1eU
23°C	320	kJ/m ²	
-30°C	280	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
23°C	9	kJ/m ²	
-30°C	8	kJ/m ²	
Puncture - maximum force, 23°C	2000	N	ISO 6603-2
Puncture energy, 23°C	3	J	ISO 6603-2
Izod notched impact strength			ISO 180/1A
23°C	9	kJ/m ²	
-30°C	8	kJ/m ²	
Izod impact strength			ISO 180/1U
23°C	280	kJ/m ²	
-30°C	250	kJ/m ²	
Hardness, Rockwell, M-scale	92	-	ISO 2039-2
Hardness, Rockwell, R-scale	120	-	ISO 2039-2
Thermal properties	Value	Unit	Test Standard
Melting temperature, 10°C/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
1.8 MPa	95	°C	
0.45 MPa	160	°C	

Revised: 2018-06-20

Page: 1 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Vicat softening temperature, 50°C/h, 50N	155	°C	ISO 306
Ball pressure test	165	°C	IEC 60309
Coeff. of linear therm. expansion, parallel	110	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110	E-6/K	ISO 11359-1/-2
RTI, electrical			UL 746B
0.75mm	50	°C	
1.5mm	110	°C	
3mm	110	°C	
RTI, impact			UL 746B
0.75mm	50	°C	
1.5mm	85	°C	
3mm	90	°C	
RTI, strength			UL 746B
0.75mm	50	°C	
1.5mm	90	°C	
3mm	95	°C	
Electrical properties	Value	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	3.8	-	
1MHz	3.8	-	
Dissipation factor			IEC 62631-2-1
100Hz	90	E-4	
1MHz	55	E-4	
Volume resistivity	2E12	Ohm*m	IEC 62631-3-1
Surface resistivity	4E14	Ohm	IEC 62631-3-2
Electric strength	44	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112
Other properties	Value	Unit	Test Standard
Humidity absorption, 2mm	0.3	%	Sim. to ISO 62
Water absorption, 2mm	1.4	%	Sim. to ISO 62
Density	1420	kg/m ³	ISO 1183
VDA Properties	Value	Unit	Test Standard
Emissions	<8	mg/kg	VDA 275
Fogging, F-value (refraction)	90	%	ISO 6452
Fogging, G-value (condensate)	0.35	mg	ISO 6452
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-
Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mould temperature	80	°C	-
Max. mould temperature	100	°C	-
Hold pressure range	80 - 100	MPa	-
Hold pressure time	8	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-
Characteristics			
Processing	• Injection Moulding		
Delivery form	• Pellets		
Additives	• Lubricants	• Release agent	

Revised: 2018-06-20

Page: 2 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Delrin® SC655 NC010


ACETAL RESIN

Diagrams

Viscosity-shear rate

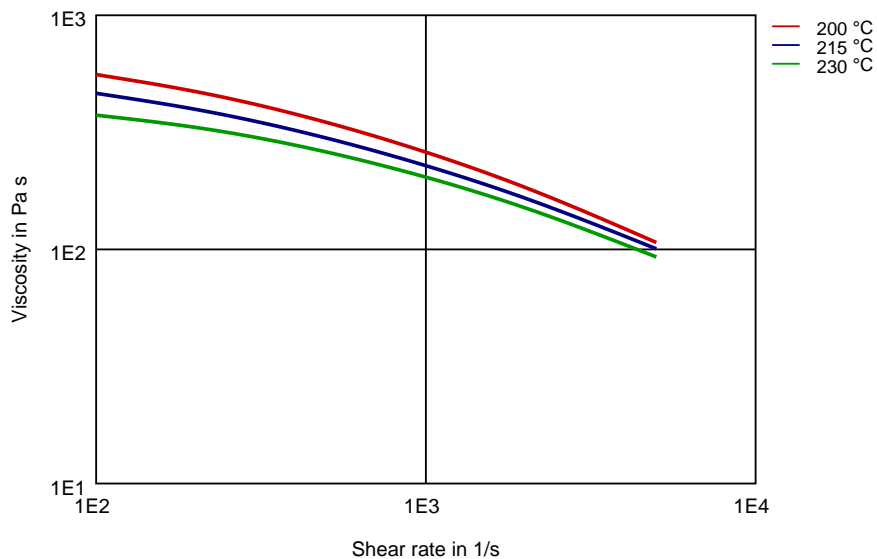


Shearstress-shear rate

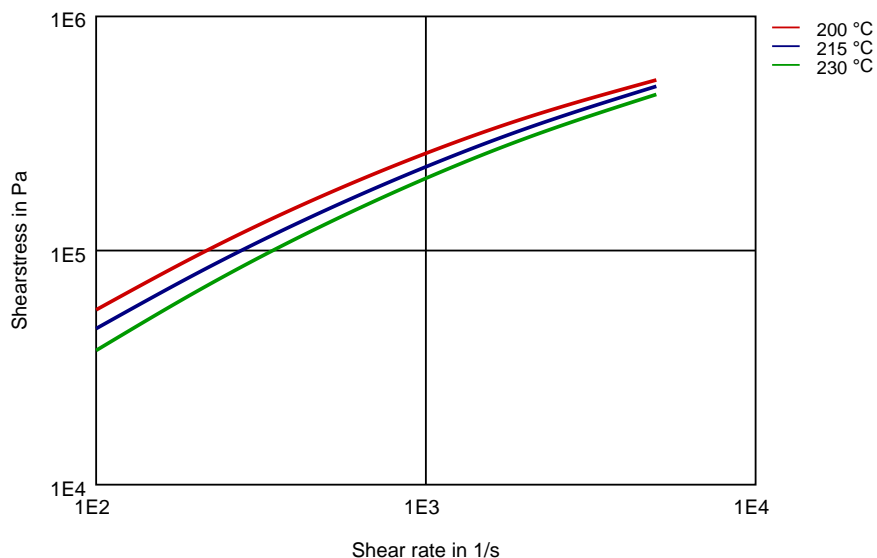

DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Dynamic Shear modulus-temperature

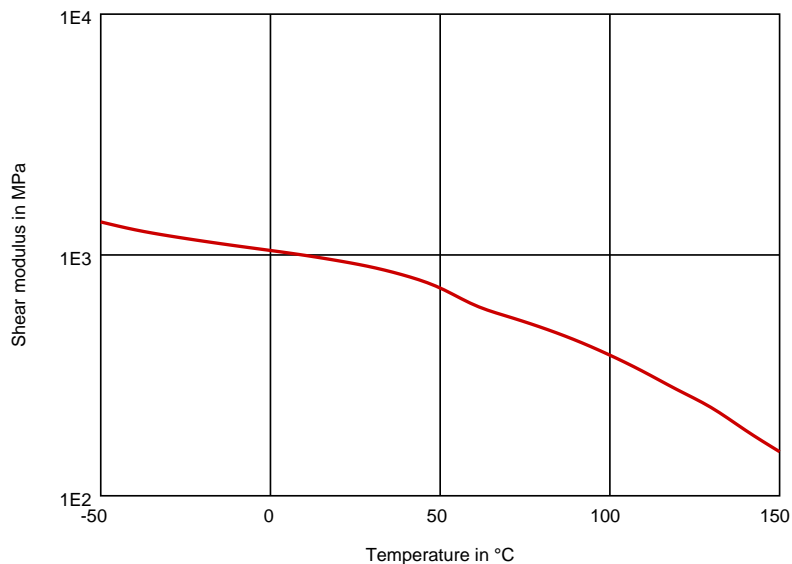

Revised: 2018-06-20

Page: 4 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Stress-strain

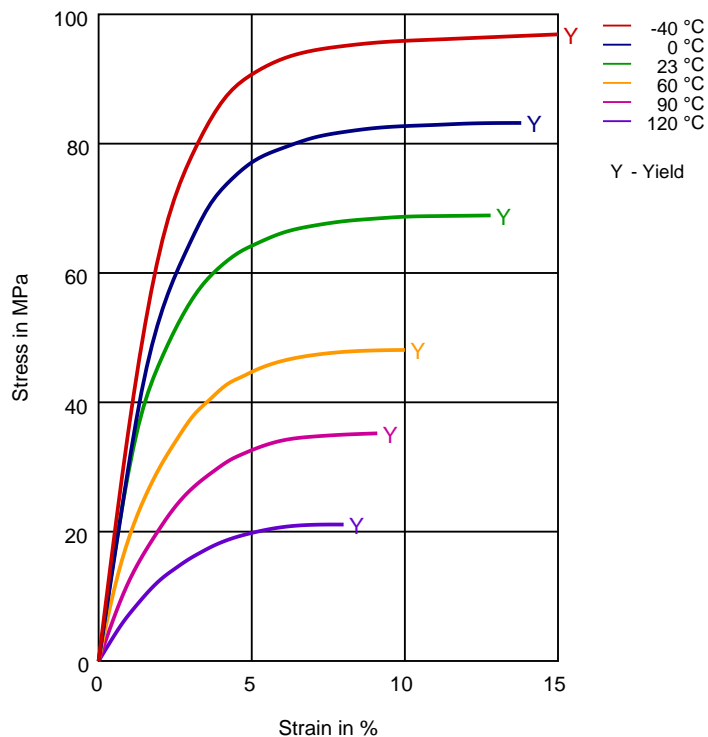

Revised: 2018-06-20

Page: 5 of 7

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Secant modulus-strain

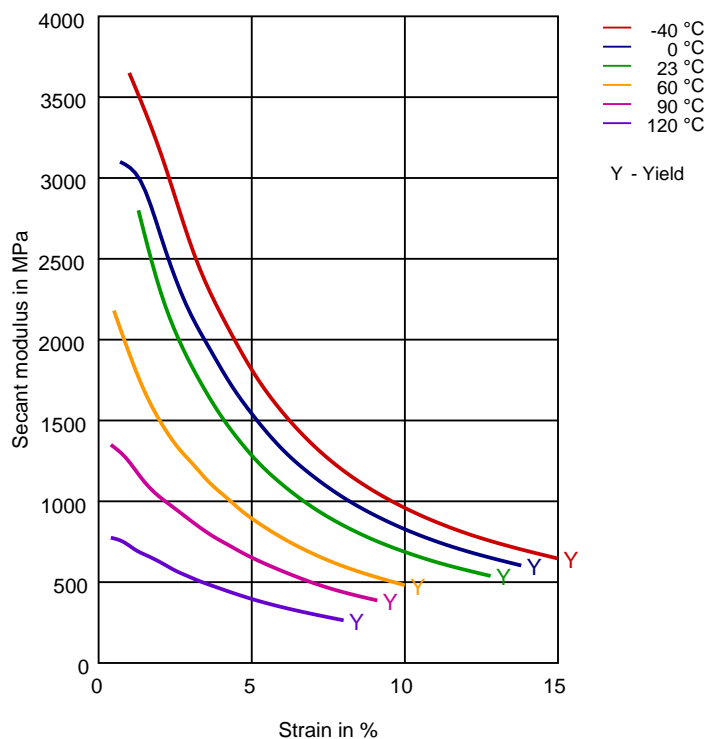

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Delrin® SC655 NC010

ACETAL RESIN

Tensile modulus-temperature

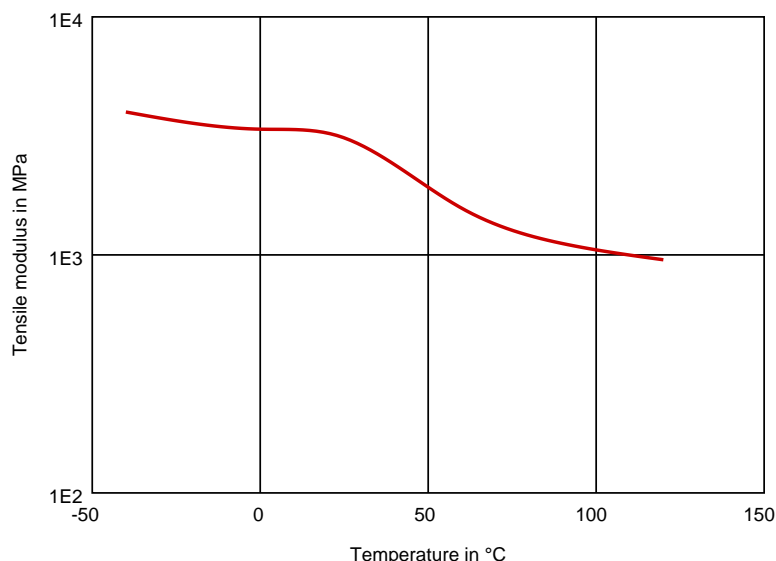

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4mm (Hytrel® measured at 2 mm), IEC Electrical properties measured at 2mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

